


配管サイズアルミ管寸法表

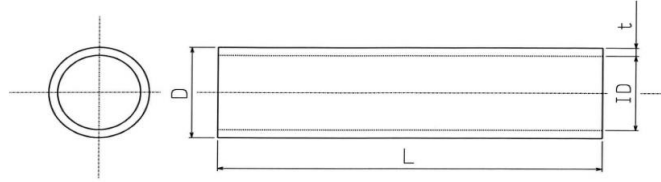

■ 受注製作品 ■ 近似サイズにて対応
 在庫品

JIS G3459 及び JIS B2313寸法のみ準用

径の呼び		厚さの呼び	S10S		S20S		S40		S80	
		外径 (mm)	厚さ (mm)	内径 (mm)	厚さ (mm)	内径 (mm)	厚さ (mm)	内径 (mm)	厚さ (mm)	内径 (mm)
A	B	D	t	ID	t	ID	t	ID	t	ID
6A	1/8	10.5	1.2	8.1	1.5	7.5	1.7	7.1	2.4	5.7
8A	1/4	13.8	1.65	10.5	2.0	9.8	2.2	9.4	3.0	7.8
10A	3/8	17.3	1.65	14.0	2.0	13.3	2.3	12.7	3.2	10.9
15A	1/2	21.7	2.1	17.5	2.5	16.7	2.8	16.1	3.7	14.3
20A	3/4	27.2	2.1	23.0	2.5	22.2	2.9	21.4	3.9	19.4
25A	1	34.0	2.8	28.4	3.0	28.0	3.4	27.2	4.5	25.0
32A	1 1/4	42.7	2.8	37.1	3.0	36.7	3.6	35.5	4.9	32.9
40A	1 1/2	48.6	2.8	43.0	3.0	42.6	3.7	41.2	5.1	38.4
50A	2	60.5	2.8(3.0)	54.9(54.5)	3.5	53.5	3.9	52.7	5.5	49.5
65A	2 1/2	76.3	3.0	70.3	3.5	69.3	5.2	65.9	7.0	62.3
80A	3	89.1	3.0	83.1	4.0	81.1	5.5	78.1	7.6	73.9
90A	3 1/2	101.6	3.0(3.05)	95.6(95.5)	4.0	93.6	5.7	90.2	8.1	85.4
100A	4	114.3	3.0	108.3	4.0	106.3	6.0	102.3	8.6	97.1
125A	5	139.8	3.4	133.0	5.0	129.8	6.6	126.6	9.5	120.8
150A	6	165.2	3.4	158.4	5.0	155.2	7.1	151.0	11.0	143.2
200A	8	216.3	4.0	208.3	6.5	203.3	8.2	199.9	12.7	190.9
250A	10	267.4	4.0	259.4	6.5	254.4	9.3	248.8	15.1	237.2
300A	12	318.5	4.5	309.5	6.5	305.5	10.3	297.9	17.4	283.7
350A	14	355.6	5.0	345.6	8.0	339.6	11.1	333.4	19.0	317.6
400A	16	406.4	5.0	396.4	8.0	390.4	12.7	381.0	21.4	363.6
450A	18	457.2	5.0	447.2	8.0	441.2	14.3	428.6	23.8	409.6
500A	20	508.0	5.5	497.0	9.5	489.0	15.1	477.8	26.2	455.6